


Compact laboratory balance KERN PKS




Laboratory specialist with clear graphics display for the most simple user guidance

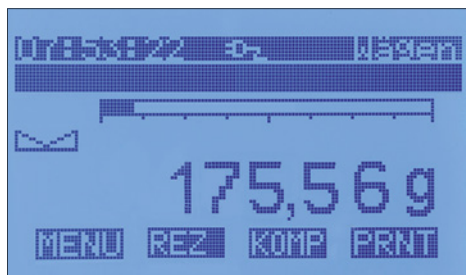

Large backlit graphic display

All relevant information for the mode you are using is displayed clearly, at a glance and assigned to the keys are assigned on the keyboard overlay

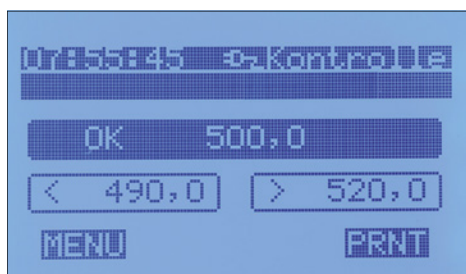

Weighing with tolerance range

(checkweighing): Input of an upper/lower limit value. A visual signal assists with portioning, dispensing or grading



Convenient recipe weighing

you can save up to 5 complete recipes in the memory with up to 7 components of each. The individual components of a mixture can be printed out clearly with their name, weight and grand total



GLP/ISO record keeping of weighing data, balance adjustment, etc. with date, time and identification no. etc. Ideal for monitoring and documenting your processes in accordance with your quality management system

Compact laboratory balance KERN PKS



Features

- Based on the KERN bestseller KB, many typical laboratory functions have been expanded to include a clear graphic screen, which shows the relevant information and makes it significantly easier to operate and read the weights off the display
- **Navigation pad** for super quick navigating through the menus
- **40 memories for each operation mode**
- Extensive print formatting – up to 20 lines with fixed and variable texts
- **Freely programmable weighing unit**, e.g. display direct in special units such as length of thread g/m, paper weight g/m², or similar
- **High mobility**: thanks to rechargeable battery operation (optional), compact, lightweight construction, it is suitable for the use in several locations (laboratory, production, quality control, commissioning etc.)
- **Ring-shaped draught shield** standard for models with weighing plate size **A**, weighing space ØxH 90x53 mm
- **Hook for underfloor weighing** of hanging loads standard

Technical data

- Large backlit LCD graphic display, screen diagonal 3,2" (approx. 81 mm)
- Weighing plate dimensions, stainless steel,
A Ø 81 mm
B WxD 130x130 mm
C WxD 150x170 mm, see enlarged picture
- Weighing plate material
A Plastic, with conductive lacquer
B, C Stainless steel
- Dimensions housing WxDxH 167x250x85 mm
- Permissible ambient temperature 10 °C / 40 °C

Accessories

- **Protective working cover** over keyboard and housing, standard. Can be re-ordered, scope of delivery: 5 items, for models with weighing plate size
A KERN PCB-A02S05 **B** KERN PCB-A04S05
C KERN PCB-A05S05
- **Rechargeable battery pack external**, operating time up to 15 hours with backlight, charging time approx. 10 h, KERN KS-A01
- **Rechargeable battery pack internal**, operating time up to 10 hours with backlight, charging time approx. 10 h, KERN KB-A01N
- **RS-232/Ethernet adapter** for connection to an IP-based Ethernet network, for details see page 180, KERN YKI-01
- **Suitable test weights**, also with calibration certificate see page 188
- **Suitable printers** and further, extensive accessories from page 177 ff.

Modes

- ① Weighing
- ② Counting
- ③ Dispensing
- ④ Recipe weighing
- ⑤ Checkweighing
- ⑥ Totalising with daily total
- ⑦ Percentage determination
- ⑧ Animal weighing
- ⑨ Surface weight


Functions

- Capacity display, with ① - ②, ⑤ - ⑦, ⑨
- Dispensing aid (-/+), with ③, ④
- Net/gross display, permanent, with ①, ③ - ⑤, ⑧ - ⑨
- Variable reference quantity, with ②
- Automatic reference optimisation, with ②
- PRE-TARE numerical or from the memory unit, with ① - ⑦
- Input of item or batch description, operator etc., with ① - ⑦
- Freely programmable weighing unit, e.g. display direct in special units such as length of thread g/m, grammage g/m², or similar, with ⑨
- Date/time, with ① - ⑨
- Statistical function, with ①
- GLP printout, with ① - ⑨
- Individual printout configuration ① - ⑨

STANDARD



OPTION



Model	Weighing range [Max] g	Readout [d] g	Repro-ducibility g	Linearity g	Min. piece weight [Counting] g/piece	Net weight approx. kg	Weighing plate	Option	
								DAkkS Calibr. Certificate	
KERN								DKD KERN	
PKS 200-3	200	0,001	0,001	± 0,003	0,001	1,1	A	963-127	
PKS 360-3	360	0,001	0,002	± 0,005	0,001	1,1	A	963-127	
PKS 2000-2	2000	0,01	0,01	± 0,03	0,01	1,5	B	963-127	
PKS 3600-2	3600	0,01	0,02	± 0,05	0,01	1,5	B	963-127	
PKS 10K0.1	10000	0,1	0,1	± 0,3	0,1	1,7	C	963-128	

ONLY WHILE STOCKS LAST !

KERN Pictograms:



Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).



Piece counting: Reference quantities selectable. Display can be switched from piece to weight.



Suspended weighing: Load support with hook on the underside of the balance.



Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required.



Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).



Battery operation: Ready for battery operation. The battery type is specified for each device.



Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.



Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.



Rechargeable battery pack: Rechargeable set.



Alibi memory: Electronic archiving of weighing results, complying with the 2009/23/EC standard.



Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, adjustment of recipe when dosages are exceeded, multiplier function, barcode.



Universal mains adapter: with universal input and optional input socket adapters for
A) EU, GB
B) EU, GB, CH, USA
C) EU, GB, CH, USA, AUS



Data interface RS-232: To connect the balance to a printer, PC or network.



Mains adapter: 230V/50Hz in standard version for EU. On request GB, USA or AUS version available.



RS-485 data interface: To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.



Totalising level A: The weights of similar items can be added together and the total can be printed out.



Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request.



USB data interface: To connect the balance to a printer, PC or other peripherals.



Totalising level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, adjustment of recipe when dosages are exceeded, multiplier function, barcode recognition.



Weighing principle: Strain gauge
Electrical resistor on an elastic deforming body.



Bluetooth* data interface: To transfer data from the balance to a printer, PC or other peripherals.



Weighing principle: Tuning fork
A resonating body is electromagnetically excited, causing it to oscillate.



WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals.



Percentage determination: Determining the deviation in % from the target value (100 %).



Weighing principle: Electromagnetic force compensation Coil inside a permanent magnet. For the most accurate weighings.



Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.



Weighing units: Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.



Weighing principle: Single cell technology
Advanced version of the force compensation principle with the highest level of precision.



Interface for second balance: For direct connection of a second balance.



Weighing with tolerance range: Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.



Verification possible:
The time required for verification is specified in the pictogram.



Network interface: For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.



Hold function: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.



DAKkS calibration possible (DKD): The time required for DAKkS calibration is shown in days in the pictogram.



Wireless data transfer: between the weighing unit and the evaluation unit using an integrated radio module.



Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram.



Package shipment: The time required for internal shipping preparations is shown in days in the pictogram.



GLP/ISO log: The balance displays the weight, date and time, regardless of a printer connection.



ATEX explosion protection: Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.



Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram.



GLP/ISO log: With weight, date and time. Only with KERN printers.



Stainless steel: The balance is protected against corrosion.



Warranty: The warranty period is shown in the pictogram.

KERN – Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAKkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAKkS calibration laboratory today is one of the most modern and best-equipped DAKkS calibration laboratories for balances, test weights and force-measurement in Europe.

Thanks to the high level of automation, we can carry out DAKkS calibration of

balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAKkS calibration of balances with a maximum load of up to 50 t
- DAKkS calibration of weights in the range of 1 mg – 2500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAKkS calibration certificates in the following languages D, GB, F, I, E, NL, PL

Your KERN specialist dealer: