





Functions	Series 573
ORIGIN (ABS-Zero)	
Auto Power OFF after 20 min. non use	
Low voltage alarm	
Data output	

Specifications


Accuracy	Refer to the list of specifications (excluding quantizing error)
Max. response speed	Unlimited
Digital step	0,01 mm
Battery life	approx. 15000 hours (150 mm, 200 mm) 5000 hours (300 mm)
Display	LCD, Character Height 7,5 mm (150 mm, 200 mm) 10,2 mm (300 mm)
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic cable with data switch (1 m)
05CZA625	Digimatic cable with data switch (2 m)
02AZD790A	Connecting cable U-Wave with data switch
06ADV380A	USB Input Tool Direct cable (2 m)


Consumable spares

No.	Description
938882	Battery SR44



Specifications

Accuracy	Refer to the list of specifications
Graduation	0,05 mm
Delivered	In a case

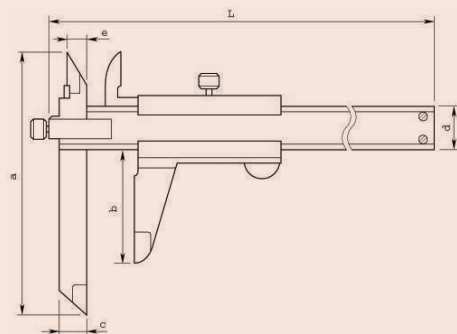

Offset Caliper

Series 573

These offset calipers enable you to measure stepped workpieces.

They offer you the following benefits:

- You can adjust the beam-mounted jaw to facilitate measurement of stepped sections and hard-to-reach workpiece features.



573-601

Metric

Without thumb roller

No.	Range [mm]	Accuracy	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
573-611	0-150	±0,02 mm	95	10	40	30	168
573-612	0-200	±0,02 mm	95	10	50	38,5	198
573-614	0-300	±0,03 mm	135	15	64	51	350


Metric

With thumb roller

No.	Range [mm]	Accuracy	a [mm]	b [mm]	c [mm]	d [mm]	Mass [g]
573-601	0-150	±0,02 mm	95	10	40	30	168
573-604	0-300	±0,03 mm	135	15	64	51	350



Series 536

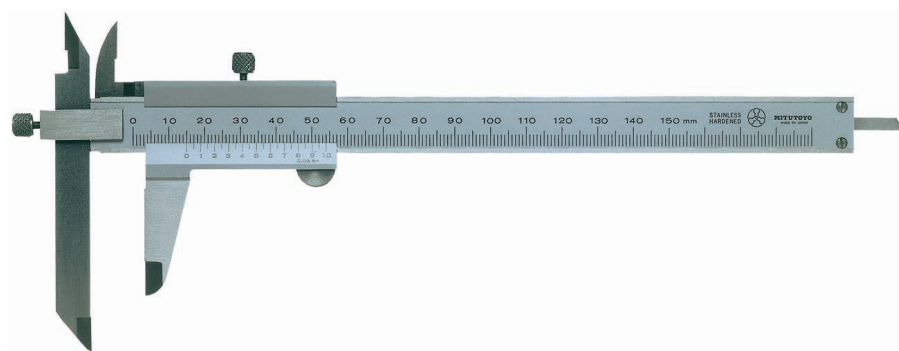

536-101

Metric

No.	Range [mm]	Accuracy	L [mm]	a [mm]	b [mm]	c [mm]	d [mm]	e [mm]	Mass [g]
536-101	0-150	±0,05 mm	229	95	40	10	16	7,5	150
536-102	0-200	±0,05 mm	286	95	50	10	16	8,5	200
536-103	0-300	±0,08 mm	403	135	64	15	20	12	400