





Functions	Series 573
ORIGIN (ABS-Zero)	
Auto Power OFF after 20 min. non use	
Low voltage alarm	
Data output	

Specifications

Accuracy	Refer to the list of specifications (excluding quantizing error)
Max. response speed	Unlimited
Digital step	0,01 mm
Battery life	approx. 15000 hours
Display	LCD, Character Height 7,5 mm
Delivered	In a case, including 1 battery

Optional accessories

No.	Description
05CZA624	Digimatic cable with data switch (1 m)
05CZA625	Digimatic cable with data switch (2 m)
02AZD790A	Connecting cable U-Wave with data switch
06ADV380A	USB Input Tool Direct cable (2 m)


Consumable spares

No.	Description
938882	Battery SR44



Specifications

Accuracy	±0,05 mm
Graduation	0,05 mm
Delivered	In a case

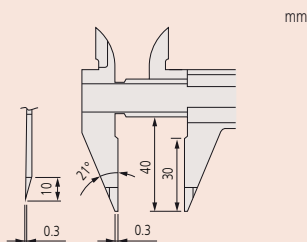

Point Caliper

Series 573

These point calipers have extra fine ground measuring jaws. They offer you the following benefits:

- Narrow-tip jaws fit into very small grooves and tracks, making it much easier for you to obtain many previously difficult outside measurements.




573-622





573-626

Metric Fine measuring jaws


No.	Range [mm]	Accuracy	Thumb roller	Mass [g]
573-625	0-150	± 0,02 mm		163
573-626	0-150	± 0,02 mm		163

Metric Pointed measuring jaws

No.	Range [mm]	Accuracy	Thumb roller	Mass [g]
573-621	0-150	± 0,02 mm		163
573-622	0-150	± 0,02 mm		163




Fine measuring jaws

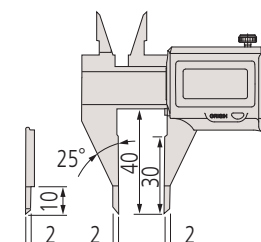

Pointed measuring jaws

Series 536

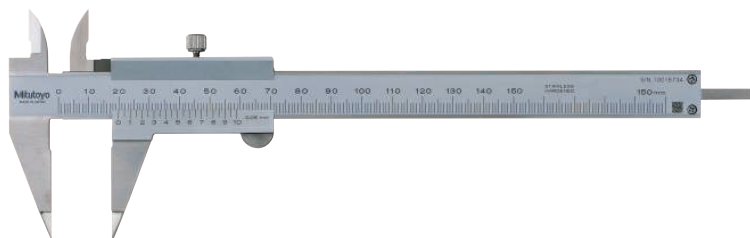

536-121

Metric

No.	Range [mm]	Mass [g]
536-121	0-150	150



Safety
Dust- and
Water-
Protected
www.tuv.com
ID: 20112074500



ABSOLUTE®
IP67