Tube Thickness Caliper

Series 573

These tube thickness calipers are designed especially for round-shaped workpieces.

They offer you the following benefits:

• The beam-mounted jaw is a round bar that lets you easily measure tube wall thickness.











573-661

| Metric | | | | |
|---------|---------------|----------|--------------|-------------|
| No. | Range [mm] | Accuracy | Thumb roller | Mass [g] |
| 573-661 | 0-150 | ±0,05 mm | (4) | 167 |
| 573-662 | 0-150 | ±0,05 mm | | 167 |






Series 536

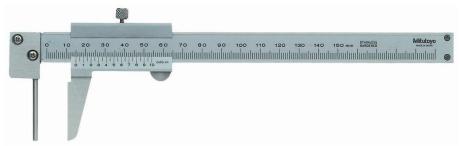

536-161

| Metric | | |
|---------|---------------|-------------|
| No. | Range [mm] | Mass [g] |
| 536-161 | 0-150 | 150 |



Specifications

| • | | |
|---------------|--|--|
| Accuracy | Refer to the list of specifications (excluding quantizing error) | |
| Max. response | Unlimited | |
| speed | | |
| Digital step | 0,01 mm | |
| Battery life | approx. 15000 hours | |
| Display | LCD, Character Height 7,5 mm | |
| Delivered | In a case, including 1 battery | |
| | | |

Optional accessories

| No. | Description | |
|-----------|--|--|
| 05CZA624 | Digimatic cable with data switch (1 m) | |
| 05CZA625 | Digimatic cable with data switch (2 m) | |
| 02AZD790A | Connecting cable U-Wave with data switch | |
| 06ADV380A | USB Input Tool Direct cable (2 m) | |

Consumable spares

| No. | Description |
|--------|--------------|
| 938882 | Battery SR44 |



Specifications

| Accuracy | ±0,05 mm |
|------------|-----------|
| Graduation | 0,05mm |
| Delivered | In a case |

