


Special caliper

S_Cal EVO BT DM

DESCRIPTION

DEEP MEASUREMENT

- **Integrated Bluetooth® Smart data transmission**
- Long internal jaws for deep measurements
- Programmable button according to your needs
- Water protected for heavy-duty work with coolants and lubricants, protection rating IP67 according to IEC 60529,
- Automatic wake-up by moving the electronic on his frame. (Absolute System S.I.S)
- Sleeping mode after 20 min. of no use. (Absolute System S.I.S)
- Position memorized in sleeping mode, **Absolute System S.I.S***
- Maximum speed of displacement : 2.5 m/sec
- Mechanical frame in stainless steel, hardened and grinded
- Great comfort of use thanks to its ergonomic frame

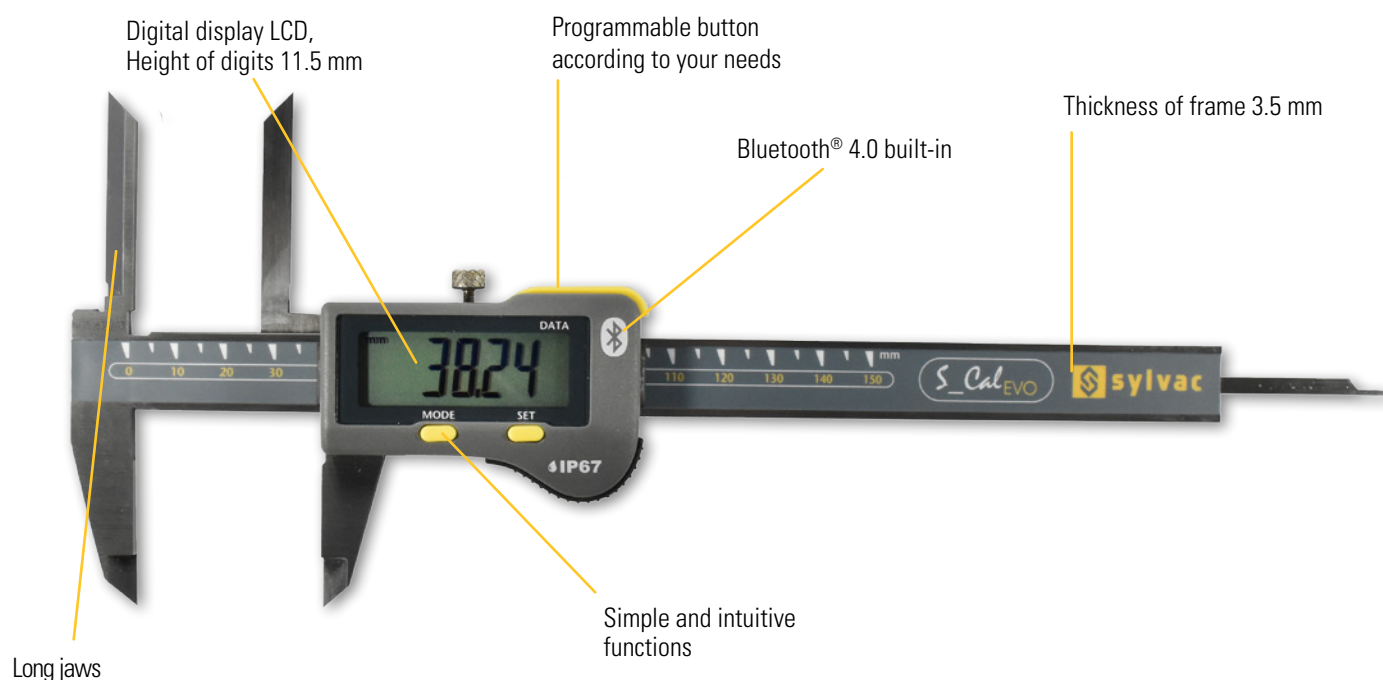

SIS Smart Inductive System



IP67

Long internal jaws for deep measurements

* SIS description on page 5


Special caliper

S_Cal EVO BT DM

DIMENSIONAL DRAWING

DEEP MEASUREMENT

A

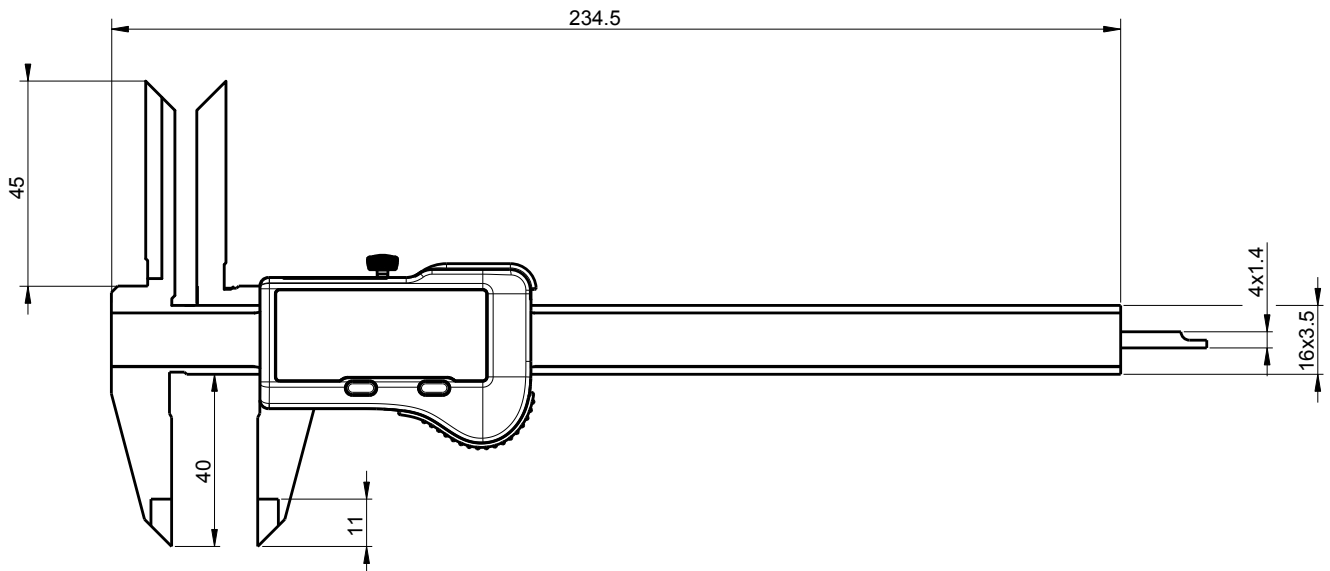

TECHNICAL SPECIFICATIONS

| | | 810.1603 |
|--|----|--|
| Measuring range | mm | 150 |
| Max. Error G | µm | 20 ¹⁾ |
| Depth rod | mm | 4 x 1.4 |
| Protection rating according to IEC 60529 | | IP67 |
| Connection | | Built-in BLUETOOTH® 4.0* |
| Functions | | Zero setting, Preset (max 999.99), mm/inch, Hold, Data |
| Smart Inductive Sensor | | ● |

¹⁾ > 100 mm : 30 µm / DIN 862

*** Up to 8 instruments connected per dongle #981.7100**
More informations on How to use Bluetooth® leaflet SYL_1401_EN_BT