

# S.C. STREBAU S.R.L

OFERTĂ PROMOȚIONALĂ ȘUBLERE SYLVAC – ELVEȚIA

Șubler 150 mm

S\_Cal\_WORK 150 mm cylindrical depth rod


910.0507.10

## Workshop caliper

## S\_Cal WORK

### DESCRIPTION


- Maximum speed of displacement : 2 m/sec
- Mechanical frame in stainless steel, hardened and ground
- Automatic switch off mode
- Thumb wheel on request (see accessories)

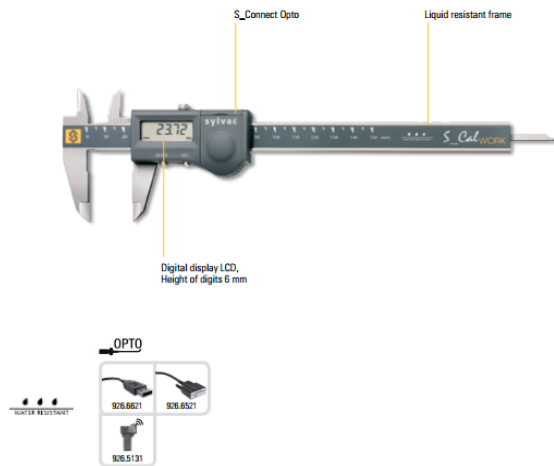

## Workshop caliper

## S\_Cal WORK

### DIMENSIONAL DRAWING

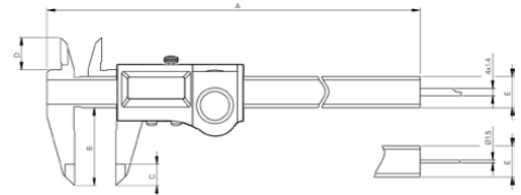

### TECHNICAL SPECIFICATIONS

		910.0502	910.0507	910.0522	910.0532
Measuring range	mm	150	150	200	300
Max. Error G	μm	20 <sup>1)</sup>	20 <sup>1)</sup>	30	30
A	mm	233	233	290	385
B	mm	40	40	50	65
C	mm	10	10	14	14
D	mm	16	16	20	20
E	mm	16 x 3	16 x 3	16 x 3	16 x 4
Depth rod	mm	4 x 1.4	Ø 1.5	4 x 1.4	---
Protection rating according to IEC 60529		IP54 with or without connector			
S_Connect : Opto		USB / RS232 / Wireless <sup>2)</sup>			
Zero setting		●			
REL and ABS functions		●			

<sup>1)</sup> > 100 mm : 30 μm / DIN 862  
<sup>2)</sup> see cables chapter

Preț de listă 139 EUR

Preț de promoție 69 EUR

Prețurile nu conțin TVA

Ofertă valabilă în limita stocului disponibil

TIMIȘOARA str. Glad 65B/1  
Cod fiscal: RO13867188

Tel. 0526-243580

Email: [office@strebau.ro](mailto:office@strebau.ro)

Autorizație : J35/526/2001

Cont lei Raiffeisen : RO73RZB0000060003679453

# S.C. STREBAU S.R.L

Şubler 200 mm

S\_Cal\_EVO 200mm IP54 rect depth rod, no output  
810.1422.10


## Caliper

## S\_Cal EVO

### DESCRIPTION

### STANDARD

- **Standard professional caliper**
- New extra-large display
- Automatic wake-up by moving the electronic on his frame. (Absolute System S.I.S)
- Sleeping mode after 20 min. of no use. (Absolute System S.I.S)
- Position memorized in sleeping mode, **Absolute System S.I.S\***
- Maximum speed of displacement : 2.5 m/sec
- Mechanical frame in stainless steel, hardened and grinded
- Great comfort of use thanks to its ergonomic frame
- Thumb wheel on request (see accessories)

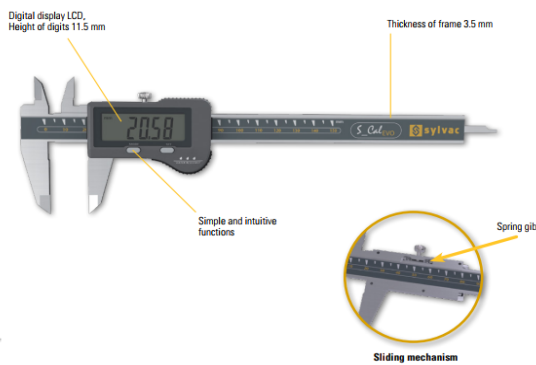

WATER RESISTANT

IP54


Coolant and lubricant resistant

## Caliper

## S\_Cal EVO

### DIMENSIONAL DRAWING

### STANDARD

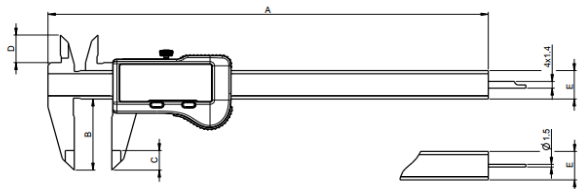

### TECHNICAL SPECIFICATIONS

	810.1402	810.1407	810.1422	810.1432
Measuring range	mm 150	150	200	300
Max. Error G	µm 20 <sup>a</sup>	20 <sup>a</sup>	30	30
A	mm 234.5	234.5	290.5	388
B	mm 40	40	50	64
C	mm 11	11	14	14
D	mm 16	16	19	19
E	mm 16 x 3.5	16 x 3.5	16 x 3.5	16 x 4
Depth rod	mm 4 x 1.4	Ø 1.5	4 x 1.4	---
Protection rating according to IEC 60529				IP54
Functions	Zero setting, Preset (max 999.99), mm/inch, Hold			
Smart Inductive Sensor	●			

<sup>a</sup> > 100 mm : 30 µm / DIN 862

Preț de listă 192 EUR

Preț de promoție 97 EUR

Prețurile nu conțin TVA

Ofertă valabilă în limita stocului disponibil

TIMIȘOARA str. Glad 65B/1  
Cod fiscal: RO13867188

Tel. 0526-243580

Email: [office@strebau.ro](mailto:office@strebau.ro)

Autorizație : J35/526/2001

Cont lei Raiffeisen : RO73RZB0000060003679453